

A modern heritage post-top luminaire, upgraded with high-performance light engines. Its aesthetically designed and robust construction ensures long-lasting durability under all weather conditions, maintaining optimal performance throughout the lifetime of the installation. The product is offered with symmetrical light distribution.

### Product Description

- Luminaire made of extruded aluminium alloy (grade 6063) with gravity die-cast aluminium components and non corrosive SS fasteners.
- Clear toughened glass.
- Luminaire integrated with 30W LED.
- Suitable for mounting on 50mm OD pipe.
- Cable entries for through-wiring of mains supply cable
- Integral constant current power supply
- CRI (Ra) :  $\geq 80$
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24849-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



### Product Benefits

- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly.
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application

Illuminating parks, Gardens, commercial complex, Pathways in residential buildings & office complex.

### Available Finish

Pure polyester powder coated


RAL 9004 Black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey



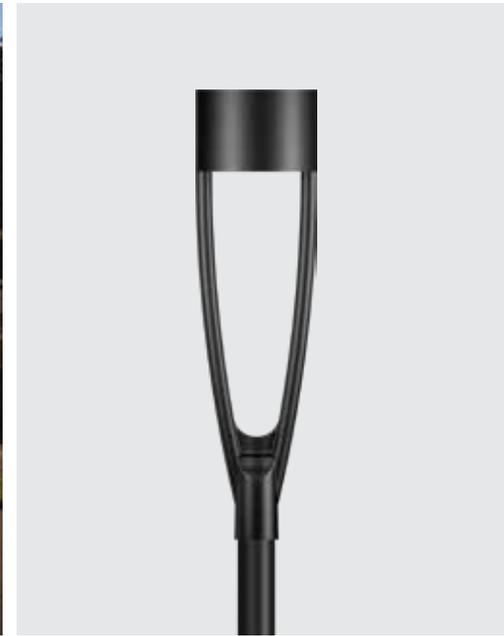

OPEN SOURCE

**Technical Specifications**

**General**

ID	: 24849
System Wattage	: 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

**Light Source**

Light Source	: LUMILEDS / BRIDGELUX
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

**Physical**

Body	: Extruded & Die-cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for Mounting on Ø50mm OD Pipe
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

**Driver**

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >88%

**Optical Performance**

Beam Angle	: Symmetrical
------------	---------------

